



SFH- LM Pipe Shaft

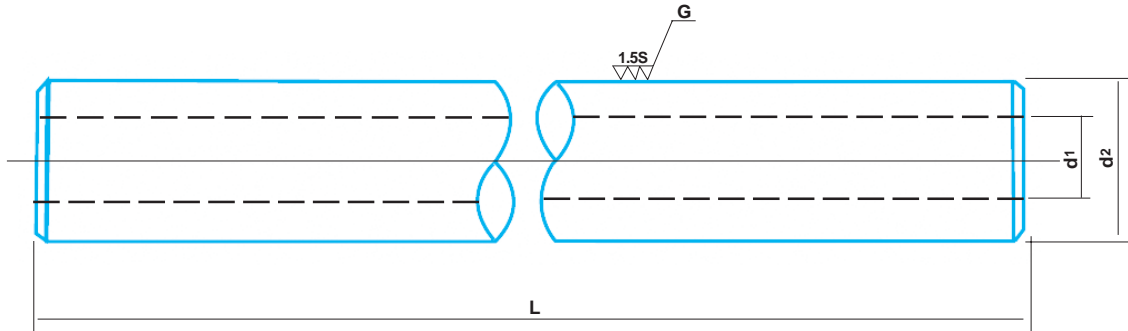

Outer diameter d ₂ mm	Inner diameter d ₁ mm	Type No SFH	Tolerance μm g 6	Standard length L mm													Effective case hardened zone mm	Weight kgf/m	Outer diameter d ₂ mm	Inner diameter d ₁ mm		
				100	200	300	400	500	600	800	1000	1200	1500	1800	2000	2500					3000	3500
16	8	SFH 16	-6 -17																OVER 1.5	1.18	16	8
20	14	SFH 20	-7																		20	14
25	15	SFH 25	-20																		25	15
30	16	SFH 30	-9																		30	16
35	19	SFH 35	-25																		35	19
40	20	SFH 40	-10																		40	20
50	25	SFH 50																			50	26
60	32																				60	32

SFS- SUS 440C Shaft

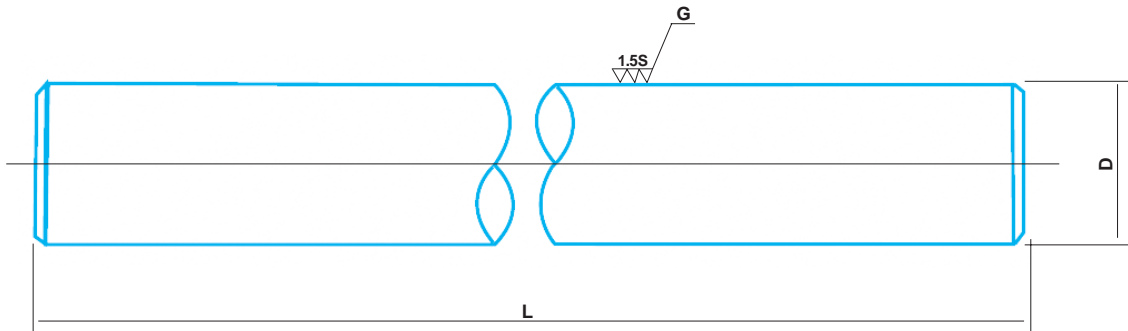

Diameter D mm	Type No SFS	Tolerance μm g 6	Standard length L mm													Effective case hardened zone mm	Weight kgf/m	Diameter D mm									
			100	200	300	400	500	600	800	1000	1100	1500	1800	2000	2500				3000	3500	4000	4500	5000	5500	6000		
6	SFS 6	-5																						OVER 1.5	0.22	6	
8	SFS 8	-14																								0.39	8
10	SFS 10	-6																								0.61	10
12	SFS 12	-17																								0.88	12
13	SFS 13	-6																							OVER 2.0	1.03	13
16	SFS 16	-7																							OVER 2.5	1.56	16
20	SFS 20	-20																								2.43	20
25	SFS 25	-9																								3.80	25
30	SFS 30	-25																								5.48	30
35	SFS 35	-9																								7.23	35
40	SFS 40	-25																								9.44	40
50	SFS 50																								OVER 3.0	15.2	50